


No. CH-16

Unit : mm

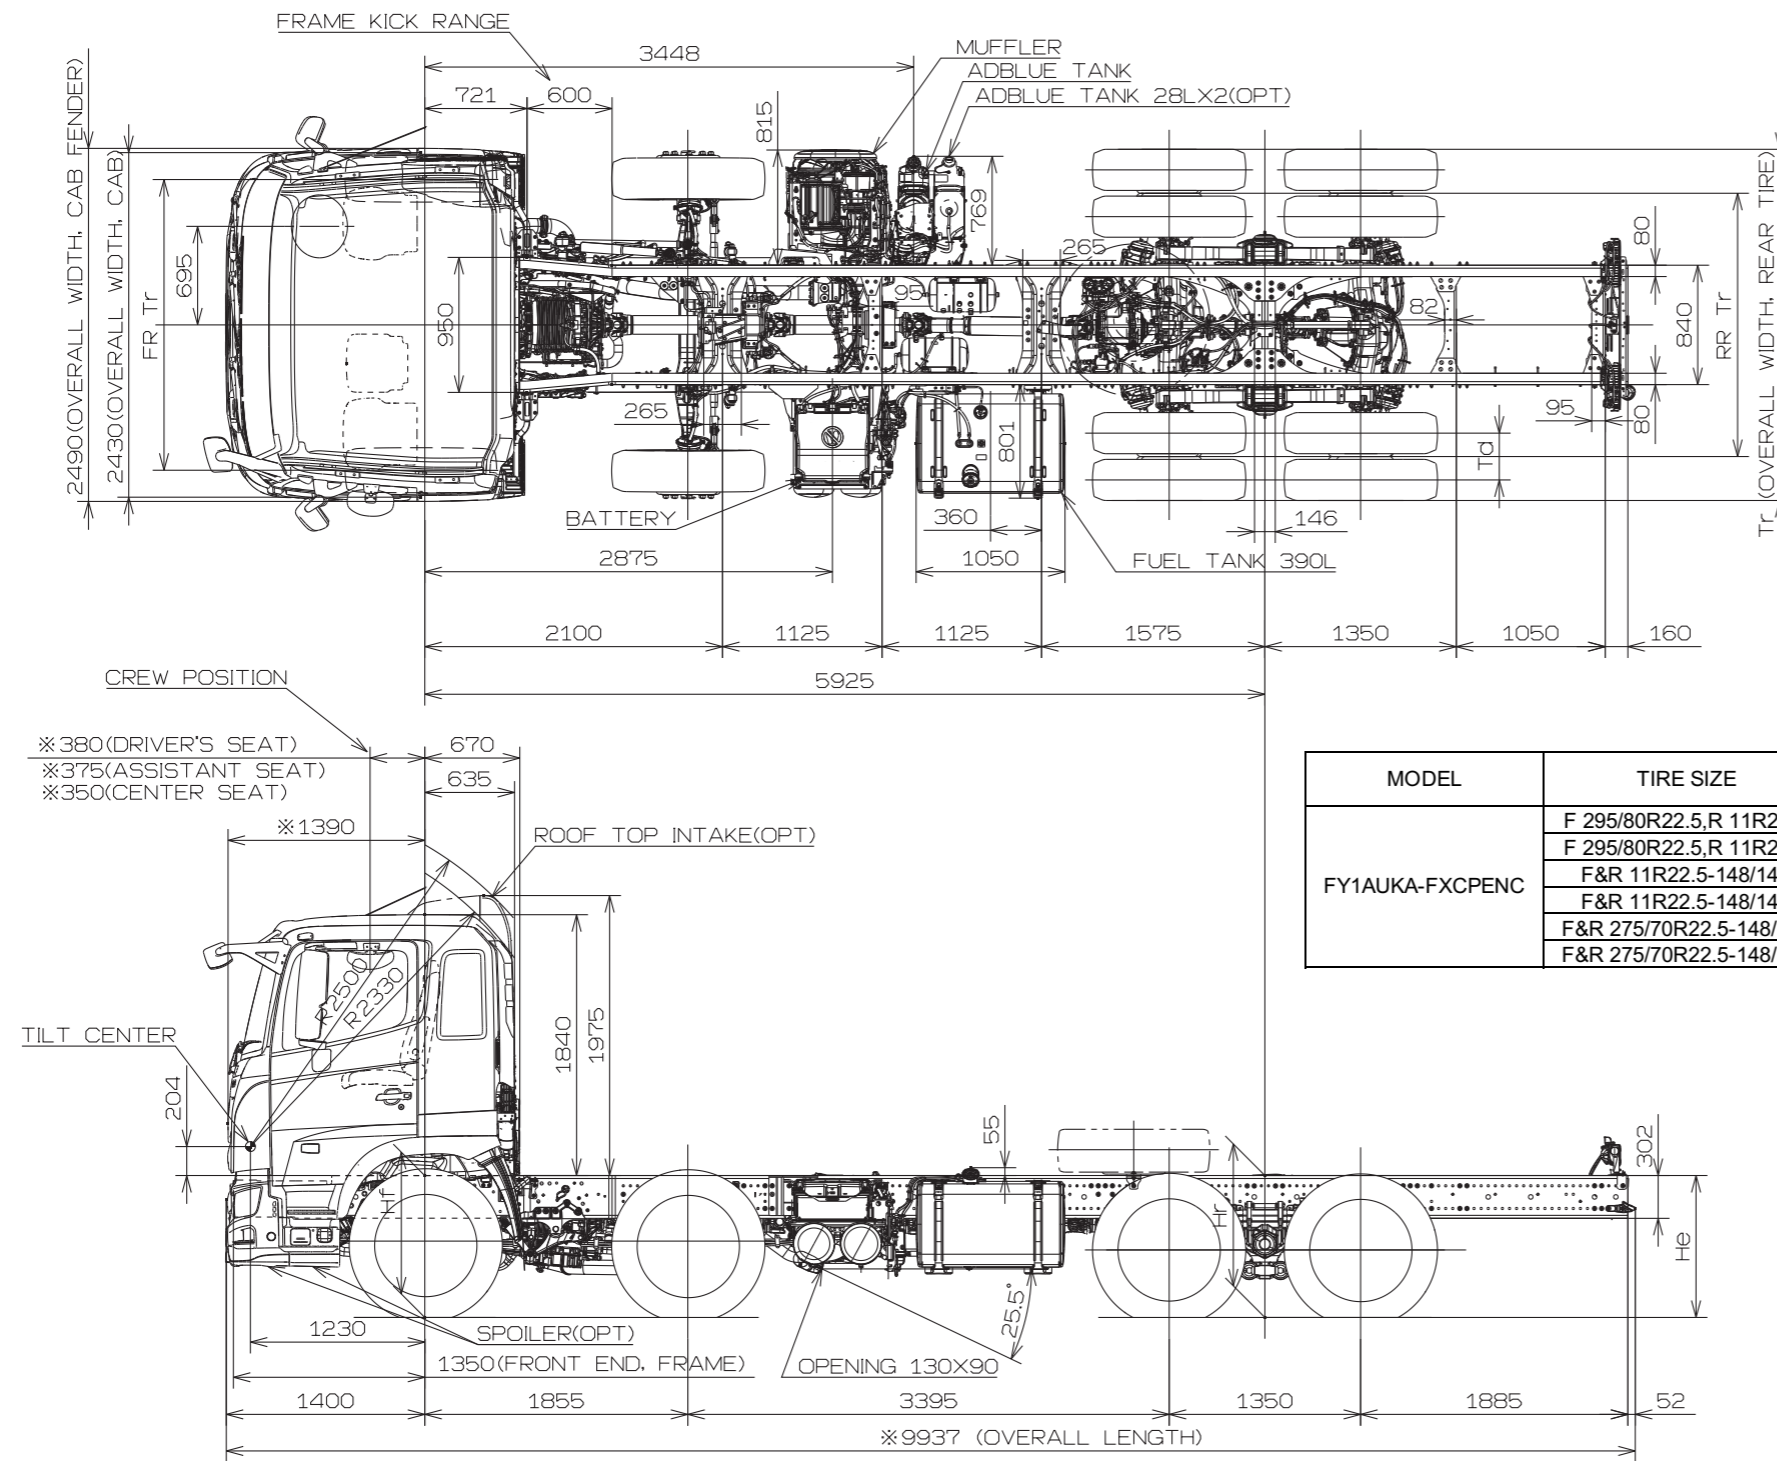

MODEL	TIRE SIZE	DISC SIZE	DIMENSIONS(mm)								
			Hf	Hr	He	A	B	FR Tr	RR Tr	Td	Tr
FY1AUKA-FXCPENC	F 295/80R22.5,R 11R22.5	F&R 22.5X8.25	1055	1069	1074.2	276	245	2050	1855	330	2466
	F 295/80R22.5,R 11R22.5	F&R 22.5X8.25 ALLOY	1055	1069	1074.2	276	245	2070	1875	330	2482
	F&R 11R22.5-148/145	F&R 22.5X8.25	1059	1069	1074.2	280	245	2050	1855	330	2466
	F&R 11R22.5-148/145	F&R 22.5X8.25 ALLOY	1059	1069	1074.2	280	245	2070	1875	330	2482
	F&R 275/70R22.5-148/145	F&R 22.5X8.25	1012	1023	1120.2	233	199	2050	1855	330	2463
	F&R 275/70R22.5-148/145	F&R 22.5X8.25 ALLOY	1012	1023	1120.2	233	199	2070	1875	330	2479

NOTE:1.Figures marked"\*"dimensions are measured in parallel with the surface of the ground.  
 2.The dimension of tire to be mentioned in above table shows design figure according to JATMA or ETRTO standard.